


过渡接头 ADAPTER

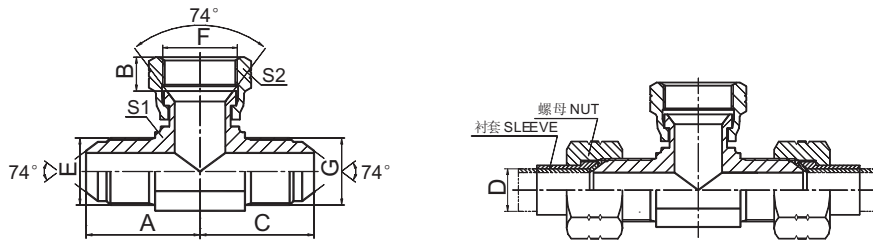

BJ

美制 JIC 外螺纹 / 美制 JIC 内螺纹 / 美制 JIC 外螺纹
JIC MALE / JIC FEMALE / JIC MALE

代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS						
	E	F	G			A	B	C	S1	S2
BJ-04	7/16"X20	7/16"X20	7/16"X20			24.5	9	24.5	11	15
BJ-05	1/2"X20	1/2"X20	1/2"X20			26.5	9.5	26.5	14	17
BJ-06	9/16"X18	9/16"X18	9/16"X18			26.9	10.5	26.9	14	19
BJ-08	3/4"X16	3/4"X16	3/4"X16			32	11	32	19	24
BJ-10	7/8"X14	7/8"X14	7/8"X14			37.8	14	37.8	22	27
BJ-12	1.1/16"X12	1.1/16"X12	1.1/16"X12			44.2	15	44.2	27	32
BJ-14	1.3/16"X12	1.3/16"X12	1.3/16"X12			47.5	15	47.5	30	36
BJ-16	1.5/16"X12	1.5/16"X12	1.5/16"X12			49	16	49	33	41
BJ-20	1.5/8"X12	1.5/8"X12	1.5/8"X12			56	17	56	41	50
BJ-24	1.7/8"X12	1.7/8"X12	1.7/8"X12			63.5	20	63.5	48	55
BJ-32	2.1/2"X12	2.1/2"X12	2.1/2"X12			78	24.5	78	63	75

注：螺母及衬套需另行订货。管子直径 D 为公制时，配用螺母及衬套分别选用 NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用 NB200、NB300。 Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.